



Internal Pressure Type UF Membrane Module

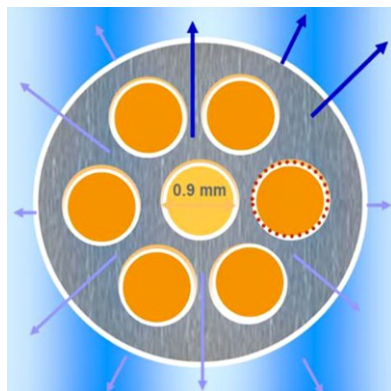

SEMAST™

0.9 MB 60 W

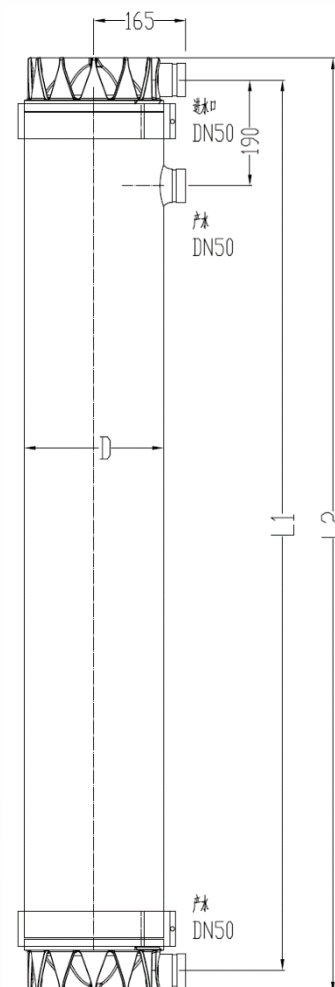

Membrane module size

Module data	0.9 MB 60 W			
Active membrane area	60	m ²	646	sq.ft.
Inlet center distance L1	1600	mm	62.99	inch
Total len with endcap L2	1680	mm	66.14	inch
Length without endcap	1486	mm	58.5	inch
Outer diameter filtrate tube D	250	mm	9.84	inch

Membrane data

Capillaries per fiber	7	
Inner diameter	0.9	mm
Pore size	0.02	μm
Material	PESM	

Internal Pressure Type UF Membrane Module

SEMAST™
0.9 MB 60 W

Technical data

Cleaning/disinfection chemicals

Free chlorine	max.200 max.200,000	ppm ppm×h
H ₂ O ₂ Hydrogen peroxide	max.500	ppm
pH range	1-13	

Flux rate

Filtration	60-180	lmh
Backwash	230-250	lmh

Transmembrane Pressure (TMP)

Filtration	0.1-1.5	bar
Backwash standard	0.3-3.0	bar
Burst pressure	> 10	bar

Material

Housing	PVC-U
---------	-------

Operation parameters

Temperature range	0-40	°C
-------------------	------	----

Attention:

Ensure adherence to NYMOI® ultrafiltration membrane components' operation manual to qualify for quality assurance. For warranty claims, submission of relevant documents as per NYMOI's requirements is imperative. Any deviation from the operation manual or any other guidelines necessitates obtaining written permission from our company. Failure to comply poses a risk to the warranty coverage.



All data provided in this document has been tested and is true and reliable. However, due to differences in various application conditions and test methods, none of the listed data shall be deemed as a guarantee or warranty.